

DD1149H


Emitter Specification

Version NO. : A/00

T

Technical
support

Type specification

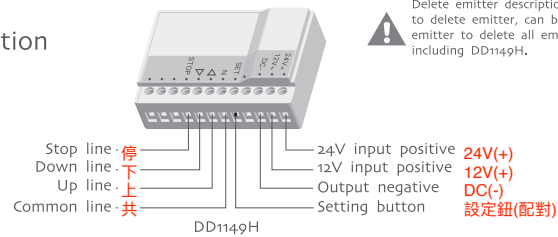

Delete emitter description: If customers need to delete emitter, can be use other matchable emitter to delete all emitter of receiver, including DD1149H.

T

Technical
support

Technical support

Technical specification	Fucntion instruction
- Inout voltage: 12V/24V - Transmitting frequency: 433.925MHz - Transmitting power: 850 milliwatt - Quiescent current: $\leq 15\text{mA}$ - Emission current: $\leq 35\text{mA}$ - Operating temperature: $-5^{\circ}\text{C} \sim 50^{\circ}\text{C}$ - Transmitting distance: 200 meters open office 35 meters on two walls	DD1149H is single-channel emitter, in bidirection mode, press and hold the up button, stop button, down button for more than 5 seconds, wireless stops emission. In unidirection mode, press and hold a button for more than 20 seconds, wireless stop emission. Notice: Emitter do not exposed to moisture and strike, so as not to affect life. When you use emitter, if found emission distance obviously short or less sensitive, please change another same new battery. Please have batteries for recycling. Caution: Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to the instructions.


A

Additional
function

Unidirection / bidirectional mode switching



Factory default is bidirectional mode, repeated operation can be cyclical switching.

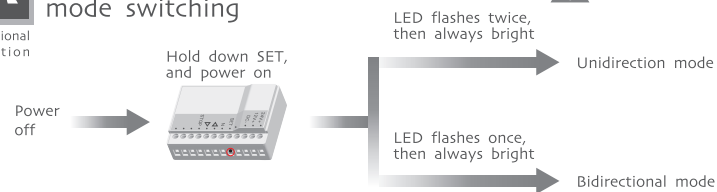

A

Additional
function

Combination button lock / unlock status



①Factory default is the combination button unlock status, repeated operation can be cycle switching.
②The combination button is locked, the combination button is invalid, and the combination button is pressed without sending code.

